

08-07-00

CK 287384845US

A

THE ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

IBM DOCKET NO. AUS000411US1

DATE: 8/3/00

JC525 U.S. PTO
09/631722

08/03/00

Sir:

Transmitted herewith for filing is the Patent Application of:

Inventors: McBrearty, et al.

For: **System and Method for Managing Multiple Proxy Servers**

Enclosed are:

- ☒ Patent Specification and Declaration.
- ☒ sheets of drawing(s). (Formal) 6 Sheets.
- ☒ An assignment of the invention to International Business Machines Corporation (includes Recordation Form Cover Sheet).
- ☐ A certified copy of a _____ application.
- ☐ Information Disclosure Statement, PTO 1449 and copies of references

The filing fee has been calculated as shown below:

For	Number Filed	Number Extra	Rate	Fee
Basic Fee				690.00
Total Claims	29	9	x \$18	\$ 162.00
Indep. Claims	3	0	x \$78	\$ 0.00
Mult. Dep. Claims	0	0	x \$260	0

Total: \$ 852.00

- ☒ Please charge my Deposit Account No. 09-0447 in the amount of \$ 852.00. A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 09-0447. A duplicate copy of this sheet is enclosed.
- ☒ Any additional filing fees required under 37 CFR Sect. 1.16.
- ☒ Any patent application processing fees under 37 CFR Sect. 1.17.

Respectfully submitted,

By

Volel Emile

Registration No. 39,969

Intellectual Property Law Dept.

IBM Corporation

11400 Burnet Road, Zip 4054

Austin, Texas 78758

Telephone: (512) 823-1005

**System and Method for Managing Multiple
Proxy Servers**

BACKGROUND OF THE INVENTION

1. Technical Field

5 The present invention relates in general to a method and system for providing multiple paths to a computer network. More particularly, the present invention relates to a method and system for client computers to use multiple proxy servers in accessing web sites on the Internet.

10 **2. Description of the Related Art**

Computer systems in general and International Business Machines (IBM) compatible personal computer systems in particular have attained widespread use for providing computer power to many segments of today's modern society.
15 Systems with microprocessors are finding themselves in an array of smaller and more specialized objects that previously were largely untouched by computer technology. Computer systems typically include a system processor and associated volatile and non-volatile memory, a display
20 area, input means, and often interfaces, such as a network interface or modem, to other computing devices.

One of the distinguishing characteristics of these systems is the use of a system board to electrically connect these components together. These computing devices
25 are information handling systems which are designed primarily to give independent computing power to a single user, or a group of users in the case of networked computer systems. Personal computing devices are often

inexpensively priced for purchase by individuals or businesses. Nonvolatile storage devices such as hard disks, CD-ROM drives and magneto-optical drives are also considered to be peripheral devices. Computer systems are often linked to other computing systems using a network, such as a local area network (LAN), wide area network (WAN), or other type of network such as the Internet. By linking to other computers, a computer system can use resources owned by another computing device. These resources can include files stored on nonvolatile storage devices and resources such as printers.

Servers perform different services for client computer systems. Web servers often provide content, or information, to client computers. Another type of server used by client computers is known as a "proxy server." In an enterprise that uses the Internet, a proxy server is a server that acts as an intermediary between a client computer system and the Internet so that the enterprise can ensure security, administrative control, and caching service. A proxy server is associated with (or is part of) a gateway server that separates the enterprise network (often a local area network (LAN)) from the outside network (i.e., the Internet) and a firewall server that protects the enterprise network from outside intrusion.

A proxy server receives a request for an Internet service (such as a Web page request) from a user of a client computer system. If it passes filtering requirements, the proxy server (assuming it is also a cache server) checks Web pages that were previously downloaded by the proxy server. If the page is found, the proxy server

returns the requested page to the user without needing to forward the request to the Internet. If the page is not in the cache, the proxy server, acting as a client on behalf of the user, uses one of its own IP addresses to request the page from the server out on the Internet. When the page is returned, the proxy server relates it to the original request and forwards it on to the user.

To the user, the proxy server is invisible; all Internet requests and returned responses appear to be directly with the addressed Internet server (i.e., Web server). (The proxy is not quite invisible; its IP address has to be specified as a configuration option to the browser or other protocol program.)

The functions of proxy, firewall, and caching can be
15 in separate server programs or combined in a single
package. Different server programs can be in different
computers. For example, a proxy server may be in the same
machine with a firewall server or it may be on a separate
server and forward requests through the firewall.

20 Because of the role they play, proxy servers can be
extremely busy machines. When a proxy server is too busy,
it cannot efficiently handle all requests received from
users. When this happens, the users have to wait for both
the proxy server and the ultimate Web server to process the
25 request, thus delaying the arrival of information at the
user's computer system.

More and more proxy servers are available to users. Many of these users have access to more than one proxy server. However, switching between available proxy servers

often involves configuring the client computer system to direct requests to a different proxy server. A challenge in the current art, therefore, is switching between multiple available proxy servers based upon a given
5 criteria.

In addition, one available proxy server may provide increased security when accessing confidential information, such as a client's banking information, while another proxy may provide better general throughput or have a larger caching area to store documents of general public interest. A challenge with the prior art exists in correlating proxy servers with particular web addresses (URLs).

What is needed, therefore, is a method for automatically switching between two or more proxy servers based upon various conditions, or events, occurring in the system.

SUMMARY

It has been discovered that providing a system and method for switching between multiple proxy provides a more efficient flow of data from servers to client computer systems. In one embodiment, the available proxy servers are automatically evaluated to determine the fastest proxy server available. The client computer system then automatically changes its configuration to direct requests to the fastest proxy server.

In another embodiment, a proxy table is accessed by the client computer to determine which proxy to use for a given web address. When a web address is included in the table, the corresponding proxy server is used to request the contents of the web address. If the web address is not included in the table, a default proxy server is used to request the information.

In yet another embodiment, a periodic test is made to determine the speed of the current proxy server. If the speed is less than a predetermined threshold, the available proxy servers are all tested and the best-performing proxy server is selected. In another embodiment, the above-described embodiments are combined to provide a proxy server to a client computer based upon either a given web address (URL) or the fastest current proxy server.

The foregoing is a summary and thus contains, by necessity, simplifications, generalizations, and omissions of detail; consequently, those skilled in the art will appreciate that the summary is illustrative only and is not intended to be in any way limiting. Other aspects,

inventive features, and advantages of the present invention, as defined solely by the claims, will become apparent in the non-limiting detailed description set forth below.

5

Parameter	Value	Unit	Significance
Mean	1.00		
Standard deviation	0.10		
Minimum	0.80		
Maximum	1.20		
Range	0.40		
Skewness	0.00		
Kurtosis	0.00		
Alpha	0.95		
Alpha squared	0.90		
Alpha if item deleted	0.91		
Mean square	1.00		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Partial eta squared	0.10		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance	0.00		
Adjusted R squared	0.09		
Model	1		
Sum of squares	0.10		
Df	1		
Significance			

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention may be better understood, and its numerous objects, features, and advantages made apparent to those skilled in the art by referencing the accompanying drawings. The use of the same reference symbols in different drawings indicates similar or identical items.

Figure 1 is a block diagram of a client computer managing the use of multiple proxy servers;

Figure 2 is a flowchart of a client computer choosing a proxy server based on proxy speed;

Figure 3 is a flowchart of a client computer choosing a proxy server based upon corresponding URLs from a proxy table;

Figure 4 is a flowchart of a client computer repetitively choosing proxy servers based upon intermittent speed tests;

Figure 5 is a flowchart of a client computer choosing a proxy server based upon a combination of speed and destination (URL) address; and

Figure 6 is a block diagram of an information handling system capable of implementing the present invention.

DETAILED DESCRIPTION

The following is intended to provide a detailed description of an example of the invention and should not be taken to be limiting of the invention itself. Rather,
5 any number of variations may fall within the scope of the invention which is defined in the claims following the description.

Figure 1 shows a block diagram of client computer system **100** selecting between proxy servers. Two proxy
10 servers, proxy server #1 (**120**) and proxy server #2 (**130**) are shown. However, more than two proxy servers may be utilized in the proxy selection described herein. Client computer system **100** runs selection routine **110** to select the proxy server to use to send request **115** to a
15 destination address in computer network **140**. One example of computer network **140** is the Internet. Selection routine **110** selects the proxy server to use based upon a predetermined algorithm. **Figures 2-5** detail various algorithms that may be implemented in selection routine
20 **110**.

Once selection routine **110** has selected a proxy server, or more specifically the network address corresponding to the selected proxy server, request **115** is sent to either proxy server #1 (**120**) or proxy server #2
25 (**130**). If request **115** is sent to proxy server #1 (**120**), then the proxy server sends request **125** to network **140** in order for server computer system **150** to receive and process the request. On the other hand, if proxy server #2 (**130**) was selected, request **135** is sent to network **140** and

processed by server computer system 150. Request 115 identifies client computer system 100 as the requestor, whereas request 125 and request 135 identify the requestor as proxy server #1 (120) and proxy server #2 (130),
5 respectively. Request 145 is the same as either request 125 or request 135, depending upon which proxy server sent the request. In this manner, the network address (i.e., IP address) of client computer system 100 is not disclosed to server computer system 150.

10 **Figure 2** shows a flowchart of one embodiment of selecting between proxy servers based upon the speed of the proxy server. Ideally, this determination is made during the initialization of the client computer system so that the fastest proxy server is known before the user requests
15 information from the network. The flowchart commences at 200 whereupon information about the proxy servers available to the computer system is read and stored in an array (input 210). The proxy server information is stored in an array named Proxy(). The total number of available proxy
20 servers is determined based on the number of proxy server records read (step 220). The variable Proxy_Select is initiated and set to 0 (zero) because a proxy server has not yet been selected (step 230). The High_Speed variable is also initiated and also set to 0 (zero) since no proxy
25 speeds have been received (step 240). For-Next loop 250 is started to test all of the proxy servers available. The first proxy server from the list read (see input 210) is tested to determine the speed at which the proxy server is returning requests (step 255). The speed test can be a
30 proxy request that is returned with the time delay measured to determine a speed. The speed test can also be

implemented by requesting information from the proxy server regarding the proxy server's current status, including its throughput speed. The proxy server can then return the information to the client computer system. Once the speed
5 has been received from the proxy server, the speed is compared against the fastest known proxy server (decision 260). The first proxy server will, unless unavailable, be faster than the initial high speed value of 0 set in step 240. If the speed is greater than the fastest known proxy
10 server speed, "yes" branch 265 is taken. "Yes" branch 265 changes the proxy selected variable to the address of the proxy server being tested (step 270), and also resets the High_Speed variable (step 275) to the speed that was returned during the speed test in step 255 before looping
15 to process the next proxy server (loop termination 285). On the other hand, if the speed returned in step 255 is not greater than the fastest currently known proxy server, "no" branch 280 is taken which loops to the next proxy server (loop termination 285). The list of proxy servers is
20 processed by loop 250 until fully processed, at which time loop 250 terminates and processing is terminated at termination step 295.

Figure 3 shows a flowchart of one embodiment of selecting a proxy server based upon the destination address
25 (i.e., web address, URL, etc.) being sought by the user. Processing commences at 300 whereupon a requested address is received from the user (input 310). The requested address is the ultimate address being sought, not the proxy server address. Proxy table 330 is provided to store
30 network addresses (i.e., web address, URL, etc.) and corresponding proxy servers the user wishes to use to

access the network address. There may be several reasons why a user wishes to use a particular proxy server to access a particular network address. For example, one proxy server may provide heightened security measures and may be preferred for confidential information. Proxy address "A" in proxy table 330 corresponds to web sites that provide the user with confidential information (an online bank site and an online retirement account site). Another example for using a particular proxy server is in order to access pages that the proxy server has cached. Receiving cached pages from a proxy server is faster than receiving the actual page from the web server. Another reason for selecting a particular proxy server would be that the server is generally faster than other proxy servers. In the example shown, proxy address "B" corresponds with a company proxy server that can provide the user with more cached pages when the user is requesting company-oriented documents. Proxy address "C" is shown being a more general purpose proxy server. This server is the default server and is also the server corresponding with general use sites, such as news and sports sites. The destination address can also be identified using wildcard characters so that all web sites with addresses that include the string "IBM" use a particular proxy server, while all those that include the string "bank" use another proxy server.

After the desired network address is received from the user (input 310), proxy table 330 is searched for a matching address (step 320). If the address is found, decision 340 branches to "yes" branch 345. A check is made as to whether the current proxy server matches the proxy

server located in proxy table 330 (decision 350). If the current proxy server matches the proxy server located in proxy table 330, "yes" branch 355 is taken and the address is requested from the proxy server (step 360). On the other hand, if the current proxy server does not match the proxy server located in proxy table 330, "no" branch 380 is taken and the client computer switches its configuration settings (step 385) to identify the proxy server located in proxy table 330 before the request is sent to the web server (step 360).

If the destination address was not found in proxy table 330, decision 340 branches to "no" branch 365 in order to use the default proxy server. The current proxy server address is compared with the default proxy server address (decision 370). If the addresses match, "yes" branch 375 is taken and the request is sent to the web server. On the other hand, if the addresses do not match, "no" branch 390 is taken and the client computer switches its configuration settings (step 395) to the default proxy server before the request is sent to the web server (step 360). In some embodiments, the default proxy server is set to equal the current proxy server so additional switching to default proxy servers is not needed.

After the request is sent to the web server (step 360), the selecting processing terminates at 399.

Figure 4 shows a flowchart for selecting a proxy server based upon the current speed of the proxy server. The logic shown in Figure 4 differs from that shown in Figure 2 in that Figure 2 established a proxy server based on proxy server speed during startup, while Figure 4

iteratively tests the current proxy server speed against a threshold, or limit, and changes the proxy server when the limit is breached. Processing commences at 400 whereupon the proxy server addresses are read (input 410) into an array. The number of proxy servers is then determined (step 420) before the fastest proxy server is identified (predefined step 430). Predefined step 430 is substantially similar to proxy server selection loop shown in Figure 2, steps 230 to 285. The result of predefined step 430 is the address of the fastest proxy server which is set at step 440.

In order to intermittently test the proxy server speed, the processing is paused for a predetermined amount of time (step 450) while the user continues to use the connection to make network requests. When the pause period is over, the current connection is tested (step 460) to determine whether the current proxy server speed has fallen below a given threshold. If the connection speed is too slow, decision 470 branches to "yes" branch 480 whereupon the fastest proxy server is once again determined (predefined step 485) and the faster server address is set, or configured, in the client computer system (step 490) before looping (loop 495) back to the pause operation (step 450). On the other hand, if the connection speed of the current proxy connection is not too slow (below the threshold), "no" branch 475 is taken looping back to the pause operation (step 450).

Figure 5 shows a flowchart that includes proxy speed attributes as well as a proxy table selector. Processing commences at 500 whereupon the proxy server addresses are

620, includes cache memory and main memory control functions, and provides bus control to handle transfers among PCI bus 625, processor 600, L2 cache 610, main memory 620, and host bus 605. PCI bus 625 provides an interface
5 for a variety of devices including, for example, LAN card 630. PCI-to-ISA bridge 635 provides bus control to handle transfers between PCI bus 625 and ISA bus 640, universal serial bus (USB) functionality 645, IDE device functionality 650, power management functionality 655, and
10 can include other functional elements not shown, such as a real-time clock (RTC), DMA control, interrupt support, and system management bus support. Peripheral devices and input/output (I/O) devices can be attached to various interfaces 660 (e.g., parallel interface 662, serial
15 interface 664, infrared (IR) interface 666, keyboard interface 668, mouse interface 670, and fixed disk (FDD) 672) coupled to ISA bus 640. Alternatively, many I/O devices can be accommodated by a super I/O controller (not shown) attached to ISA bus 640.

20 BIOS 680 is coupled to ISA bus 640, and incorporates the necessary processor executable code for a variety of low-level system functions and system boot functions. BIOS 680 can be stored in any computer readable medium, including magnetic storage media, optical storage media,
25 flash memory, random access memory, read only memory, and communications media conveying signals encoding the instructions (e.g., signals from a network). In order to attach computer system 601 another computer system to copy files over a network, LAN card 630 is coupled to PCI-to-ISA
30 bridge 635. Similarly, to connect computer system 601 to an ISP to connect to the Internet using a telephone line

connection, modem **675** is connected to serial port **664** and PCI-to-ISA Bridge **635**.

While the computer system described in **Figure 6** is capable of executing the copying processes described herein, this computer system is simply one example of a computer system. Those skilled in the art will appreciate that many other computer system designs are capable of performing the copying process described herein.

One of the preferred implementations of the invention is an application, namely, a set of instructions (program code) in a code module which may, for example, be resident in the random access memory of the computer. Until required by the computer, the set of instructions may be stored in another computer memory, for example, in a hard disk drive, or in a removable memory such as an optical disk (for eventual use in a CD ROM) or floppy disk (for eventual use in a floppy disk drive), or downloaded via the Internet or other computer network. Thus, the present invention may be implemented as a computer program product for use in a computer. In addition, although the various methods described are conveniently implemented in a general purpose computer selectively activated or reconfigured by software, one of ordinary skill in the art would also recognize that such methods may be carried out in hardware, in firmware, or in more specialized apparatus constructed to perform the required method steps.

While particular embodiments of the present invention have been shown and described, it will be obvious to those skilled in the art that, based upon the teachings herein,

changes and modifications may be made without departing from this invention and its broader aspects and, therefore, the appended claims are to encompass within their scope all such changes and modifications as are within the true spirit and scope of this invention. Furthermore, it is to be understood that the invention is solely defined by the appended claims. It will be understood by those with skill in the art that if a specific number of an introduced claim element is intended, such intent will be explicitly recited in the claim, and in the absence of such recitation no such limitation is present. For non-limiting example, as an aid to understanding, the following appended claims contain usage of the introductory phrases "at least one" and "one or more" to introduce claim elements. However, the use of such phrases should not be construed to imply that the introduction of a claim element by the indefinite articles "a" or "an" limits any particular claim containing such introduced claim element to inventions containing only one such element, even when the same claim includes the introductory phrases "one or more" or "at least one" and indefinite articles such as "a" or "an"; the same holds true for the use in the claims of definite articles.

WHAT IS CLAIMED IS:

- 1 1. A method for selecting a proxy server, said method
2 comprising:
3 identifying a plurality of proxy servers; and
4 automatically determining at least one of the proxy
5 servers to use when accessing a network.
- 1 2. The method as described in claim 1 wherein the
2 automatically determining further comprises:
3 testing a speed for each of the plurality of proxy
4 servers; and
5 determining a highest speed.
- 1 3. The method as described in claim 1 wherein the
2 automatically determining further comprises:
3 setting a minimum speed limit for a selected proxy
4 server;
5 comparing a speed for the selected proxy server with
6 the minimum speed limit; and
7 testing each of the plurality of servers in response
8 to the speed for the selected proxy server
9 falling below the minimum speed limit.
- 1 4. The method as described in claim 1 wherein the
2 automatically determining further comprises:
3 receiving a destination address; and
4 comparing the destination address to a plurality of
5 network addresses, each of the network addresses
6 corresponding with a proxy server identifier.
- 1 5. The method as described in claim 4 further comprising:

2 returning the proxy server identifier corresponding to
3 the network address that matches the received
4 destination address.

1 6. The method as described in claim 4 further comprising:
2 returning a default proxy server identifier in
3 response to the received destination address not
4 matching any of the network addresses.

1 7. The method as described in claim 4 wherein at least
2 one of the network addresses includes one or more
3 wildcard characters, the wildcard characters
4 identifying more than one address corresponding to the
5 network address.

1 8. The method as described in claim 1 further comprising:
2 modifying a proxy configuration setting using the
3 selected proxy server identifier, the proxy
4 configuration setting identifying the proxy
5 server used by a client computer system.

1 9. The method as described in claim 1 wherein the
2 identifying further comprises:
3 reading a proxy server identifier associated with each
4 of the proxy servers.

1 10. The method as described in claim 1 wherein the
2 identifying further comprises:
3 connecting to a second computer system using a
4 network; and
5 receiving a plurality of proxy server identifiers from
6 the second computer system.

1 11. The method as described in claim 1 further comprising:

00000000 2227E960

2 determining a fastest proxy server from the plurality
3 of proxy servers;
4 setting a default proxy server address to the address
5 of the fastest proxy server;
6 receiving a destination address from a user;
7 locating the destination address in a proxy table, the
8 proxy table including one or more network
9 addresses and a proxy server identifier
10 corresponding with each network address;
11 selecting the proxy server identifier corresponding
12 with the network address in response to locating
13 the destination address in the proxy table; and
14 selecting the default proxy server address in response
15 to not locating the destination address in the
16 proxy table.

- 1 12. An information handling system comprising:
2 one or more processors;
3 a memory accessible by the processors;
4 a nonvolatile storage device accessible by the
5 processors;
6 a network interface connecting the information
7 handling system to a computer network; and
8 a proxy selection tool, the proxy selection tool
9 including:
10 means for reading a plurality of proxy server
11 identifiers;
12 means for evaluating at least one of the proxy
13 servers; and
14 means for selecting one of the plurality of proxy
15 server identifiers in response to the
16 evaluating.

1 13. The information handling system as described in
2 claim 12 wherein the proxy selection tool further
3 comprises:
4 means for testing a speed for each of the plurality of
5 proxy servers; and
6 means for determining a highest speed.

1 14. The information handling system as described in
2 claim 12 wherein the proxy selection tool further
3 comprises:
4 means for setting a minimum speed limit for a selected
5 proxy server;
6 means for comparing a speed for the selected proxy
7 server with the minimum speed limit; and
8 means for testing each of the plurality of servers in
9 response to the speed for the selected proxy
0 server falling below the minimum speed limit.

1 15. The information handling system as described in
2 claim 12 wherein the proxy selection tool further
3 comprises:
4 means for receiving a destination address; and
5 means for comparing the destination address to a
6 plurality of network addresses, each of the
7 network addresses corresponding with a proxy
8 server identifier.

1 16. The information handling system as described in
2 claim 15 wherein the proxy selection tool further
3 comprises:

```

4      means for returning the proxy server identifier
5      corresponding to the network address that matches
6      the received destination address.

```

1 17. The information handling system as described in
2 claim 15 wherein the proxy selection tool further
3 comprises:

```

4      means for returning a default proxy server identifier
5      in response to the received destination address
6      not matching any of the network addresses.
```

1 18. The information handling system as described in
2 claim 15 wherein at least one of the network addresses
3 includes one or more wildcard characters, the wildcard
4 characters identifying more than one address
5 corresponding to the network address.

1 19. The information handling system as described in
2 claim 12 wherein the proxy selection tool further
3 comprises:
4 means for modifying a proxy configuration setting
5 using the selected proxy server identifier, the
6 proxy configuration setting identifying the proxy
7 server used by a client computer system.

1 20. The information handling system as described in
2 claim 12 wherein the proxy selection tool further
3 comprises:
4 means for determining a fastest proxy server from the
5 plurality of proxy servers;
6 means for setting a default proxy server address to
7 the address of the fastest proxy server;
8 means for receiving a destination address from a user;

9 means for locating the destination address in a proxy
10 table, the proxy table including one or more
11 network addresses and a proxy server identifier
12 corresponding with each network address;
13 means for selecting the proxy server identifier
14 corresponding with the network address in
15 response to locating the destination address in
16 the proxy table; and
17 means for selecting the default proxy server address
18 in response to not locating the destination
19 address in the proxy table.

1 21. A computer program product for selecting a proxy
2 server, said computer program product comprising:
3 means for reading a plurality of proxy server
4 identifiers;
5 means for evaluating at least one of the proxy
6 servers; and
7 means for selecting the proxy server identifier
8 corresponding to one of the evaluated proxy
9 servers.

1 22. The computer program product as described in claim 21
2 wherein the means for evaluating further comprises:
3 means for testing a speed for each of the plurality of
4 proxy servers; and
5 means for determining a highest speed.

1 23. The computer program product as described in claim 21
2 wherein the means for evaluating further comprises:
3 means for setting a minimum speed limit for a selected
4 proxy server;

5 means for comparing a speed for the selected proxy
6 server with the minimum speed limit; and
7 means for testing each of the plurality of servers in
8 response to the speed for the selected proxy
9 server falling below the minimum speed limit.

1 24. The computer program product as described in claim 21
2 wherein the means for evaluating further comprises:
3 means for receiving a destination address; and
4 means for comparing the destination address to a
5 plurality of network addresses, each of the
6 network addresses corresponding with a proxy
7 server identifier.

1 25. The computer program product as described in claim 24
2 further comprising:
3 means for returning the proxy server identifier
4 corresponding to the network address that matches
5 the received destination address.

1 26. The computer program product as described in claim 24
2 further comprising:
3 means for returning a default proxy server identifier
4 in response to the received destination address
5 not matching any of the network addresses.

1 27. The computer program product as described in claim 24
2 wherein at least one of the network addresses includes
3 one or more wildcard characters, the wildcard
4 characters identifying more than one address
5 corresponding to the network address.

1 28. The computer program product as described in claim 21
2 further comprising:

00000000 22222222

3 means for modifying a proxy configuration setting
4 using the selected proxy server identifier, the
5 proxy configuration setting identifying the proxy
6 server used by a client computer system.

1 29. The computer program product as described in claim 21
2 further comprising:

3 means for determining a fastest proxy server from the
4 plurality of proxy servers;

5 means for setting a default proxy server address to
6 the address of the fastest proxy server;

7 means for receiving a destination address from a user;

8 means for locating the destination address in a proxy
9 table, the proxy table including one or more

10 network addresses and a proxy server identifier
11 corresponding with each network address;

12 means for selecting the proxy server identifier
13 corresponding with the network address in
14 response to locating the destination address in
15 the proxy table; and

16 means for selecting the default proxy server address
17 in response to not locating the destination
18 address in the proxy table.

1

1

00000000 22 FEB 96

1

System and Method for Managing Multiple Proxy Servers

ABSTRACT

A system and method for managing multiple proxy servers by a client computer. In one embodiment, the client computer's configuration is set to the fastest proxy server available. In another embodiment, a proxy table is accessed by the client computer to determine which proxy to use for a given web address. When a web address is included in the table, the corresponding proxy server is used to request the contents of the web address. If the web address is not included in the table, a default proxy server is used to request the information. In another embodiment, a periodic test is made to determine the speed of the current proxy server. If the speed is less than a predetermined threshold, the available proxy servers are all tested and the best-performing proxy server is selected. In another embodiment, aspects of each of the above-described embodiments are combined to provide a proxy server to a client computer based upon either a given web address (URL) or the fastest current proxy server.

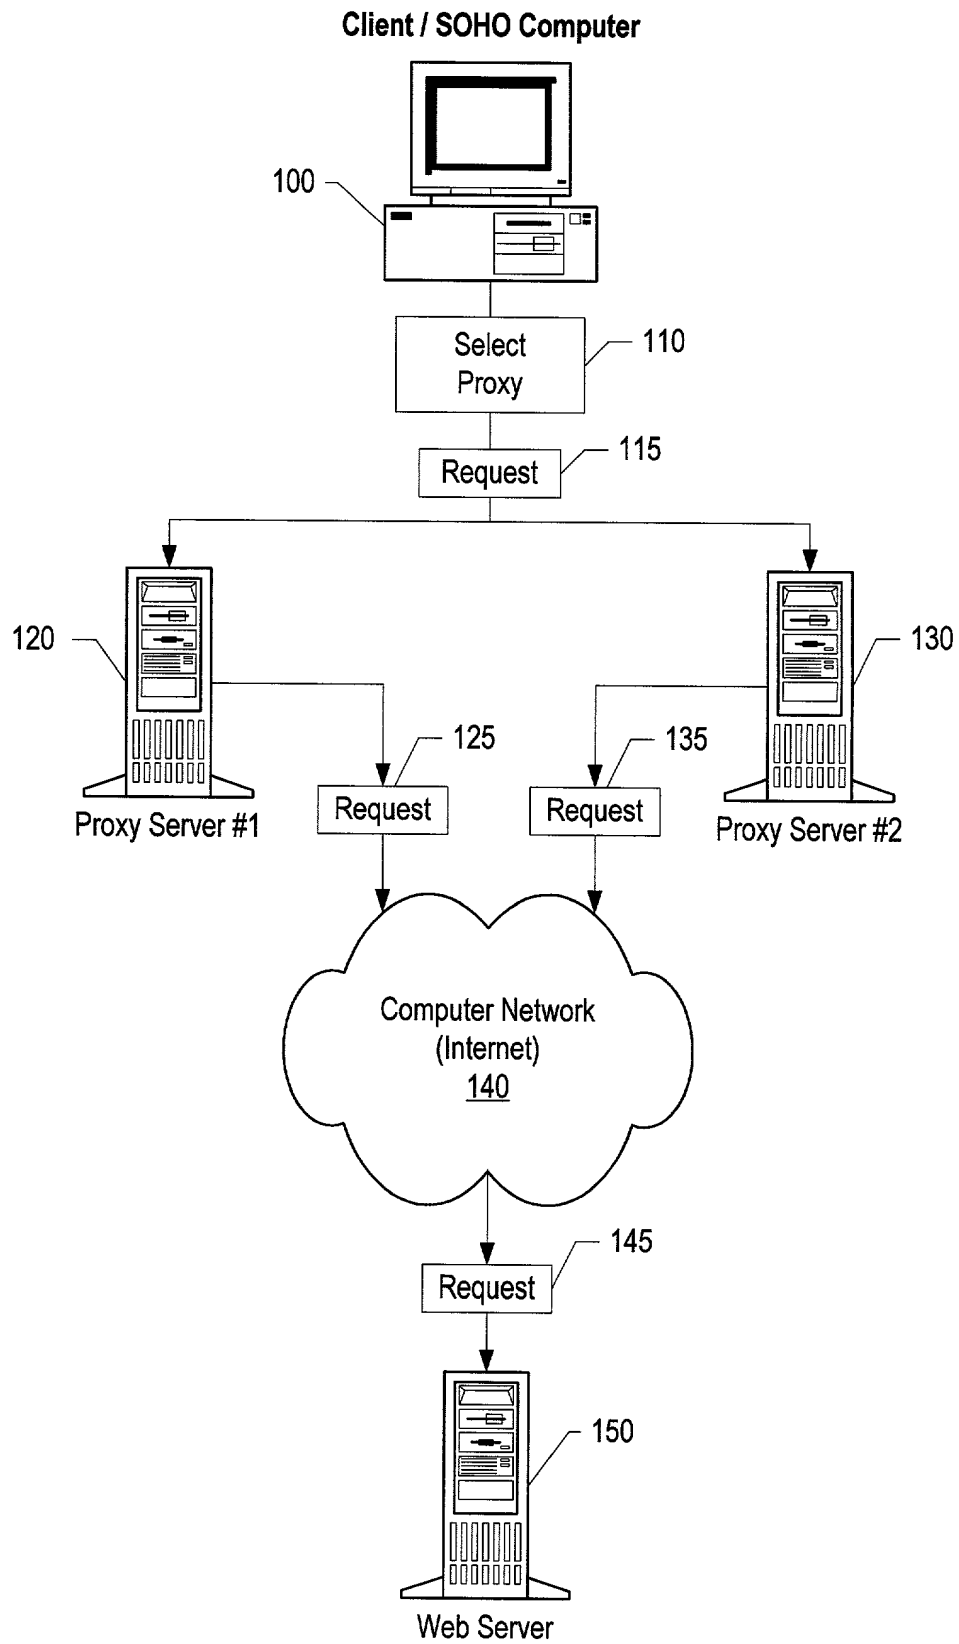


Figure 1

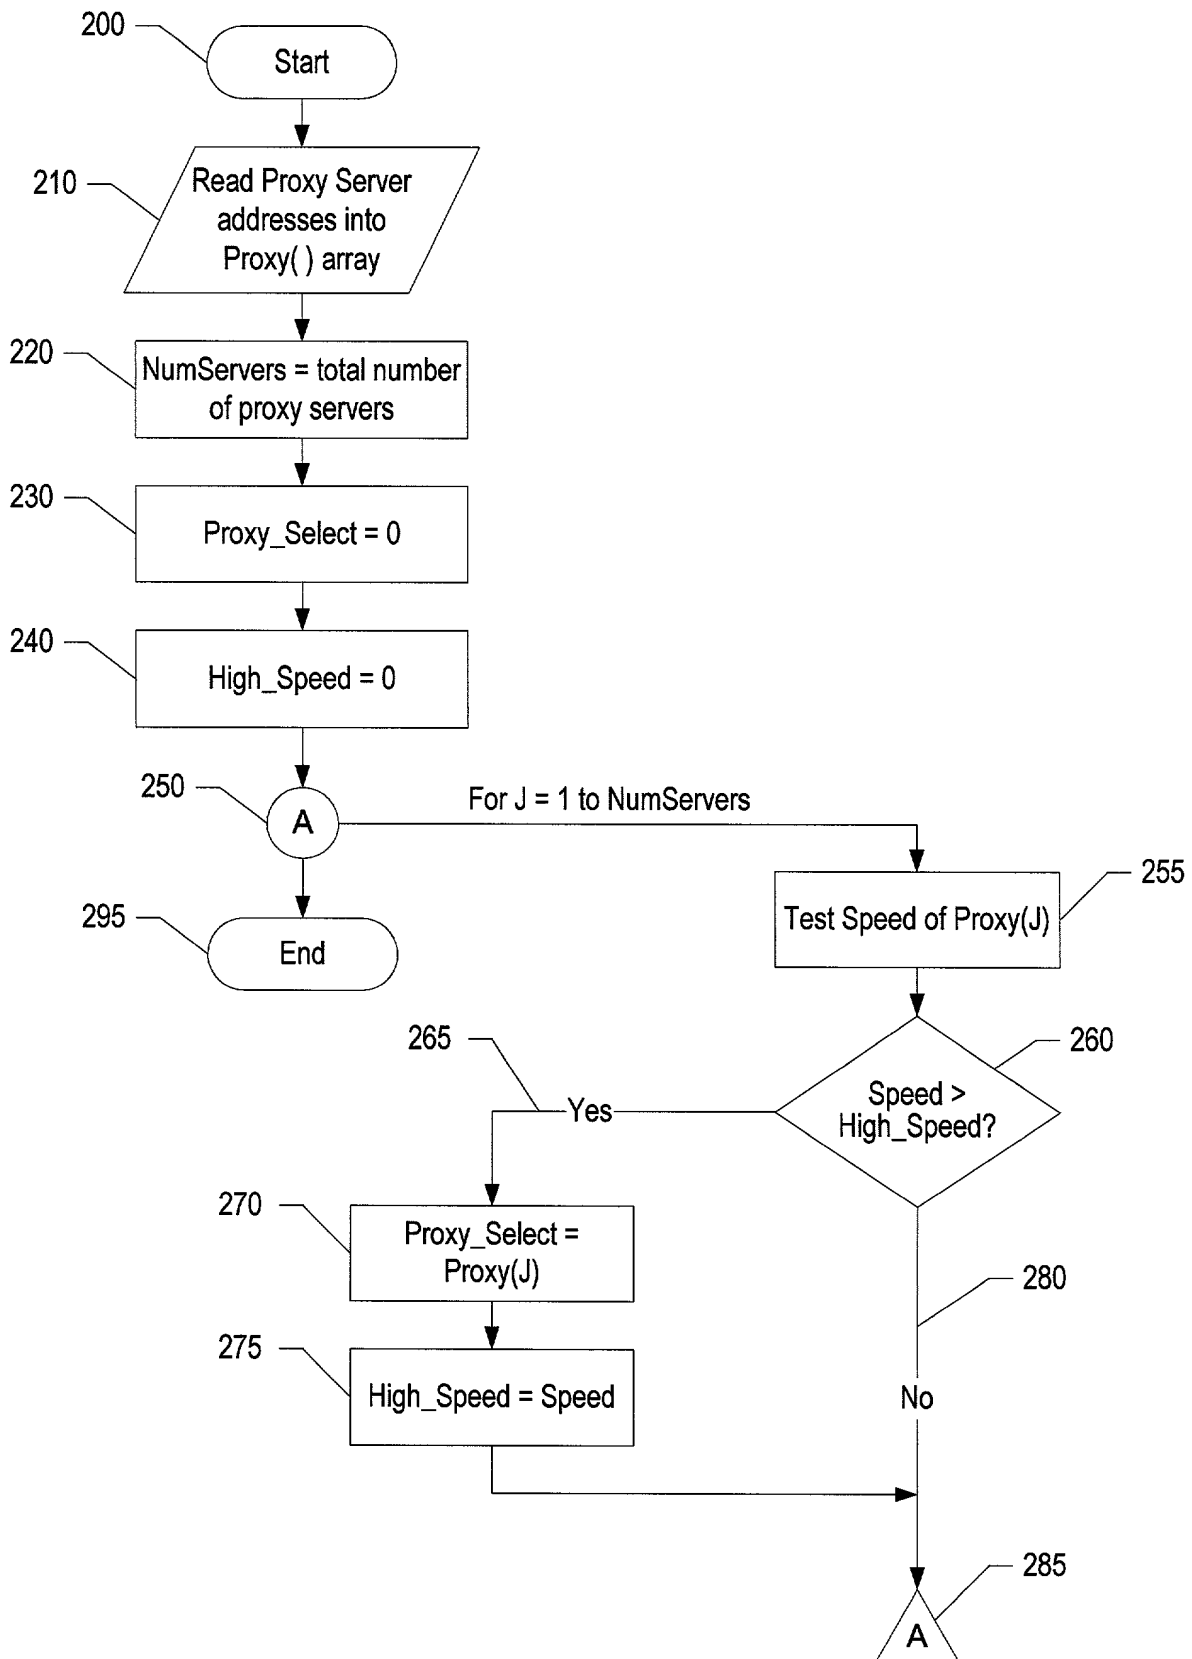


Figure 2

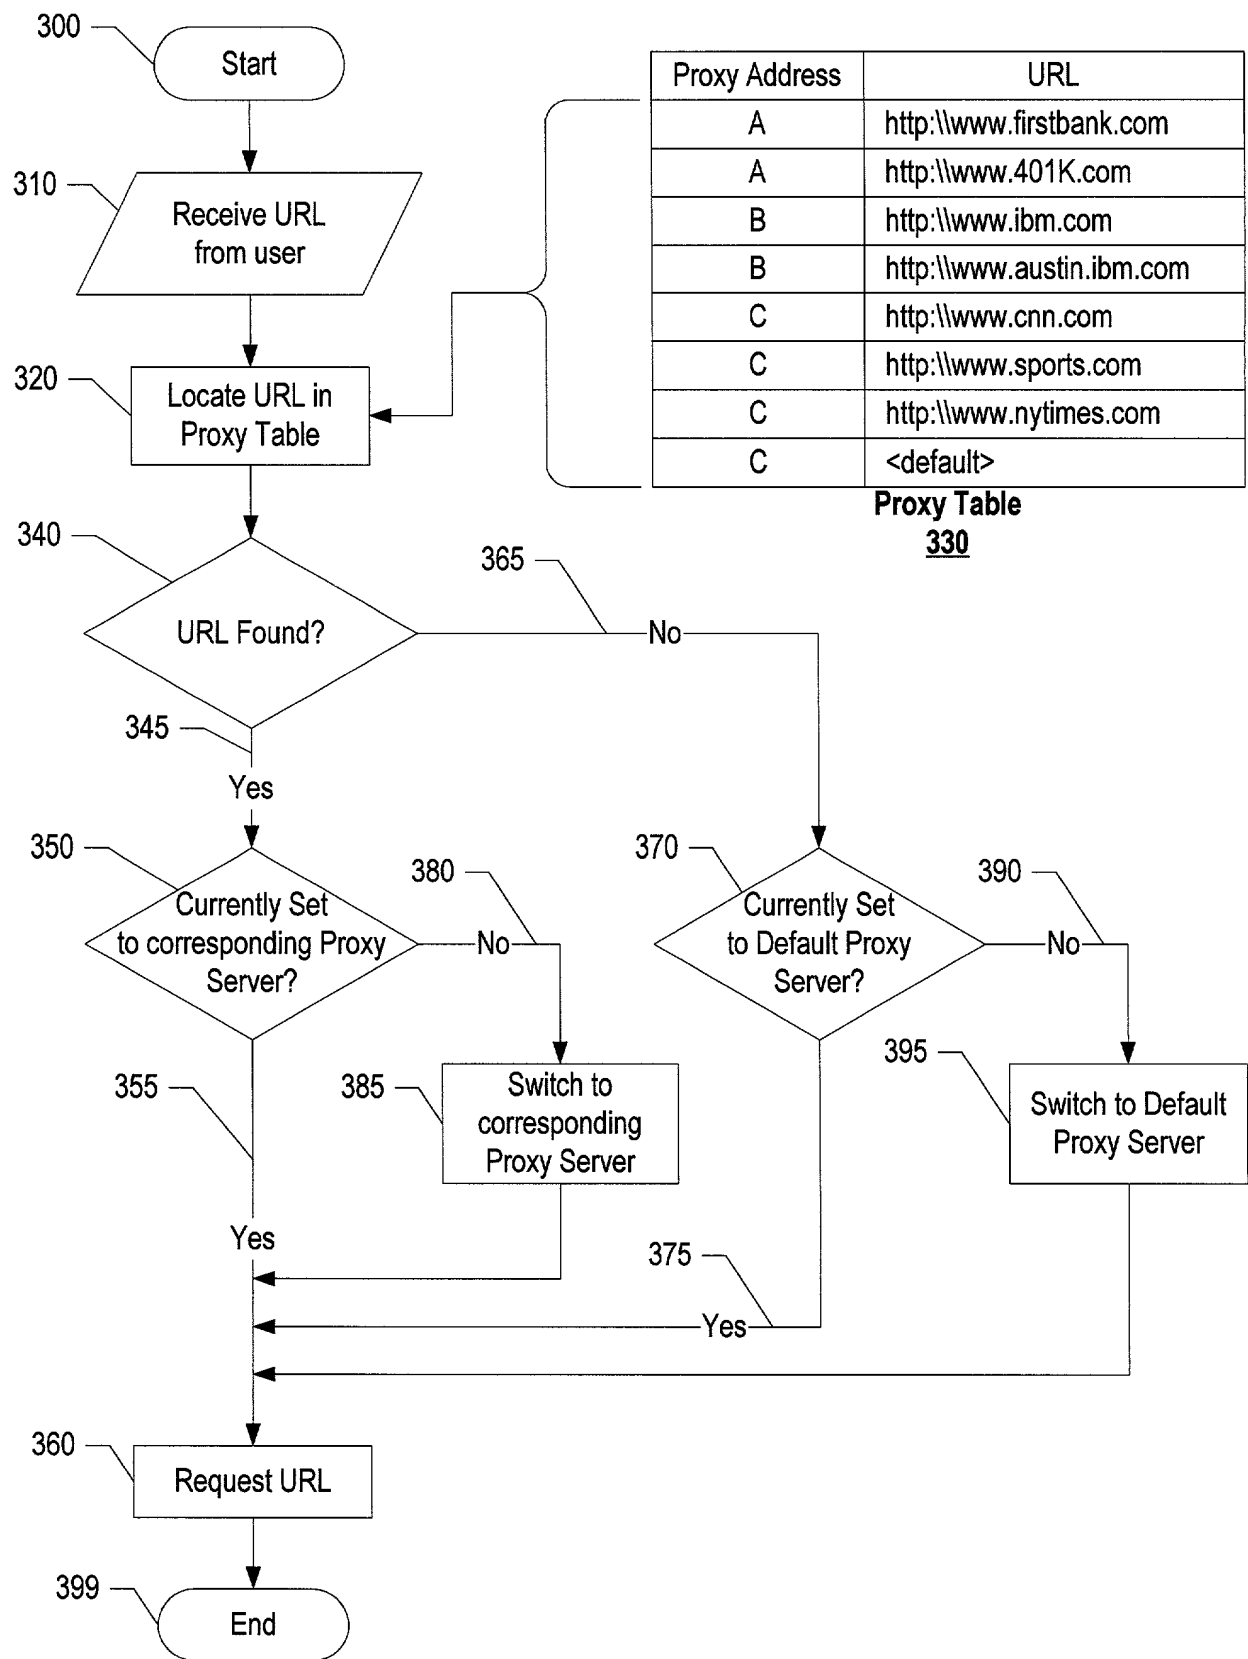


Figure 3

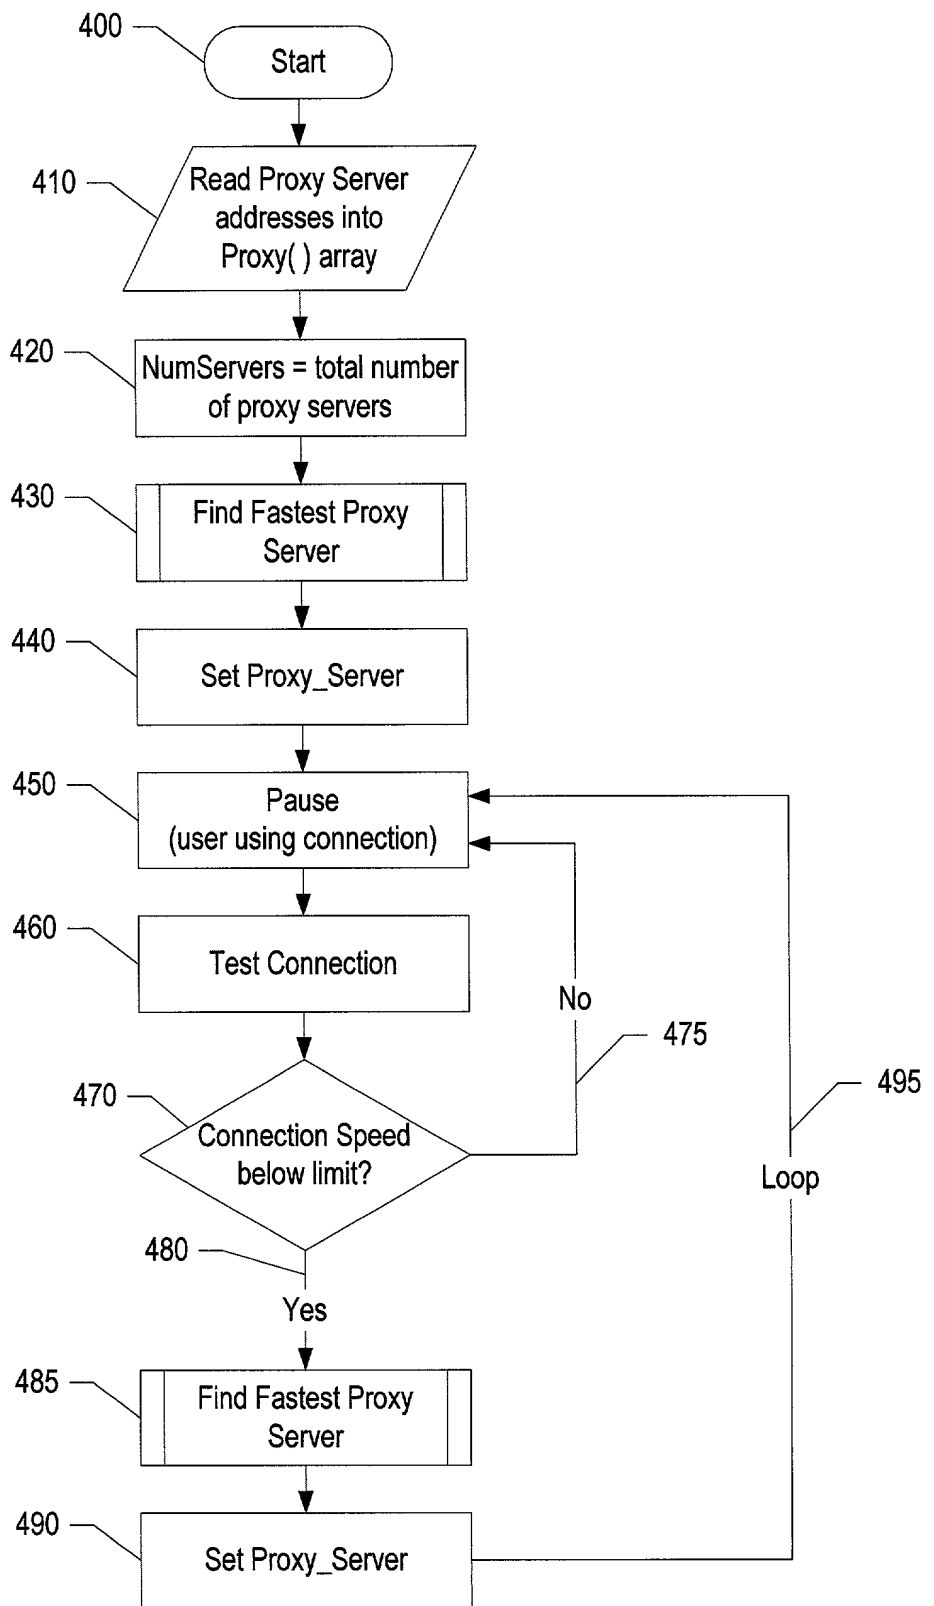


Figure 4

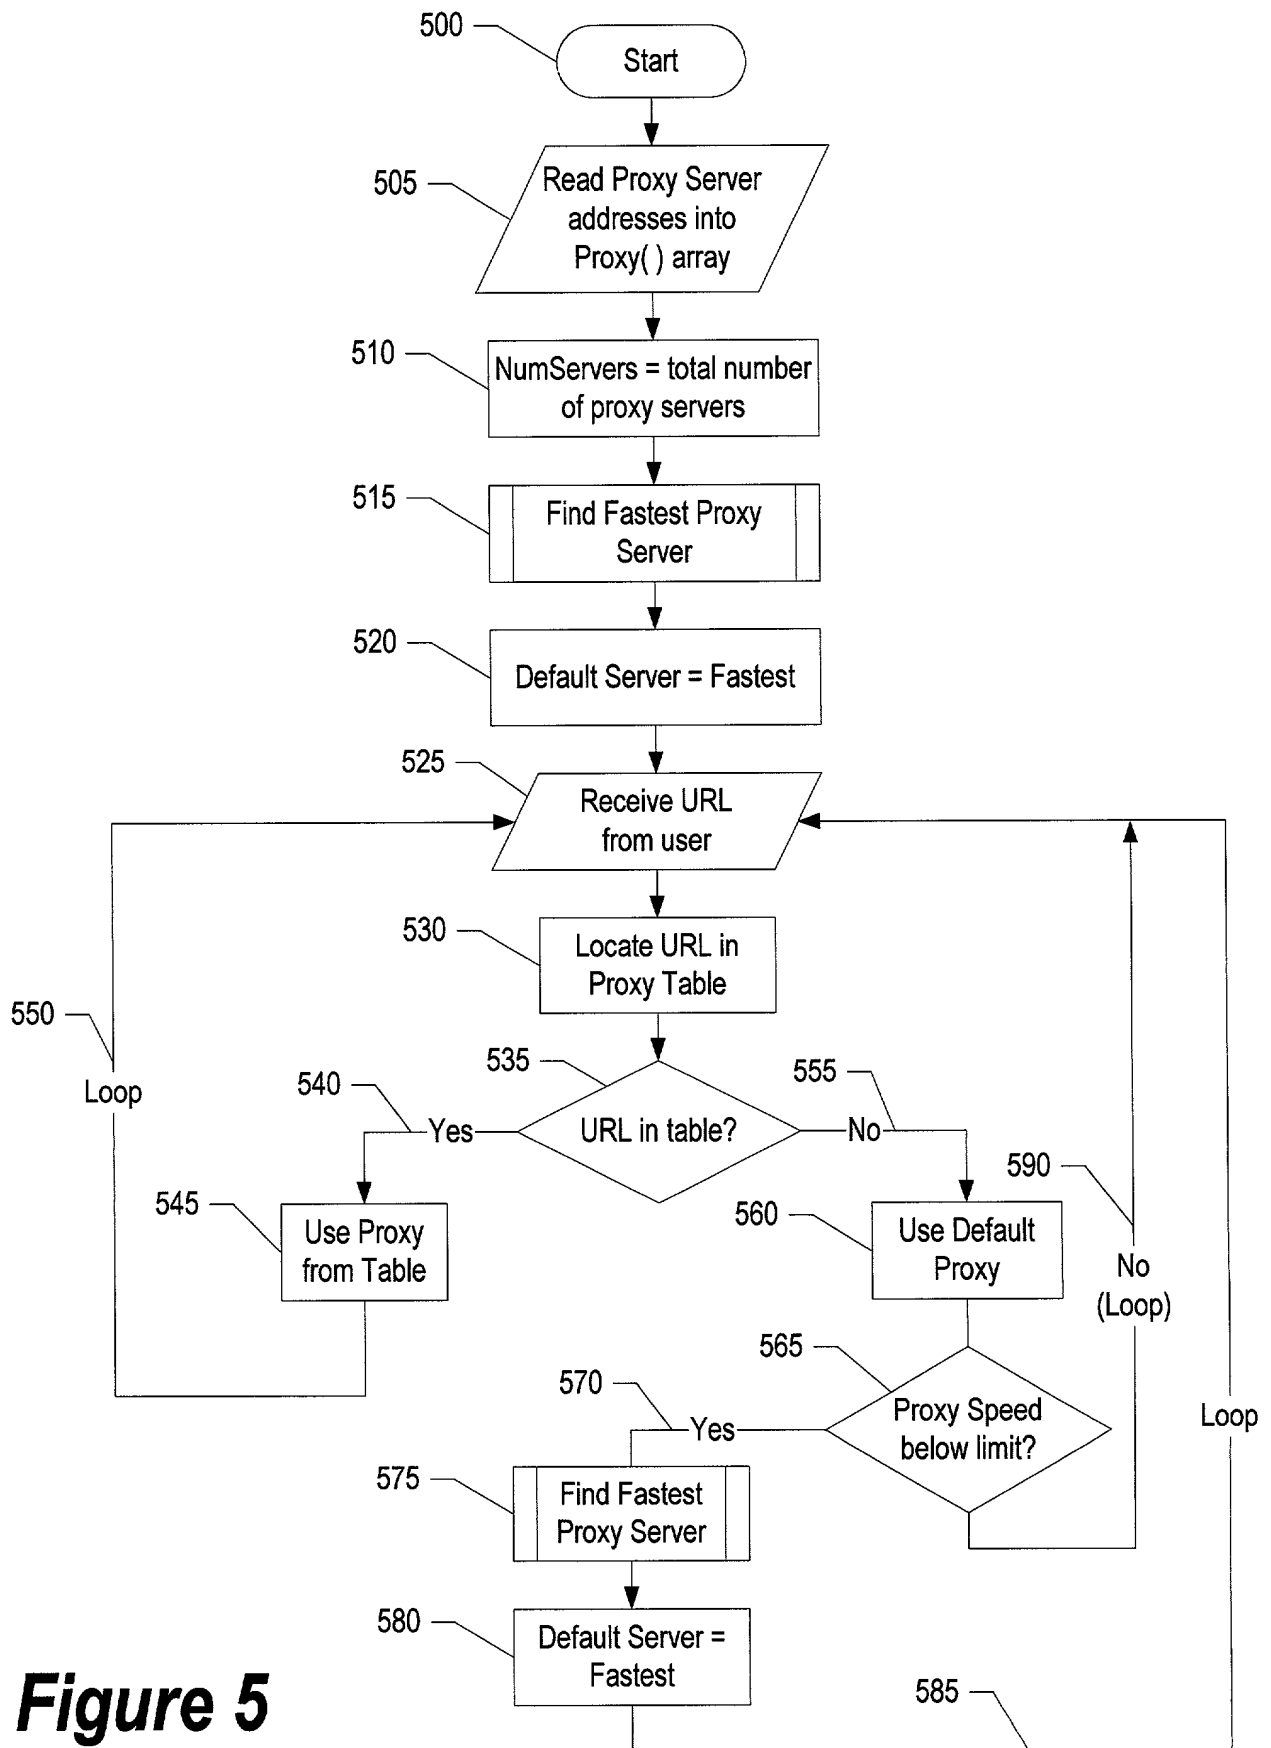


Figure 5

00000000 22222222

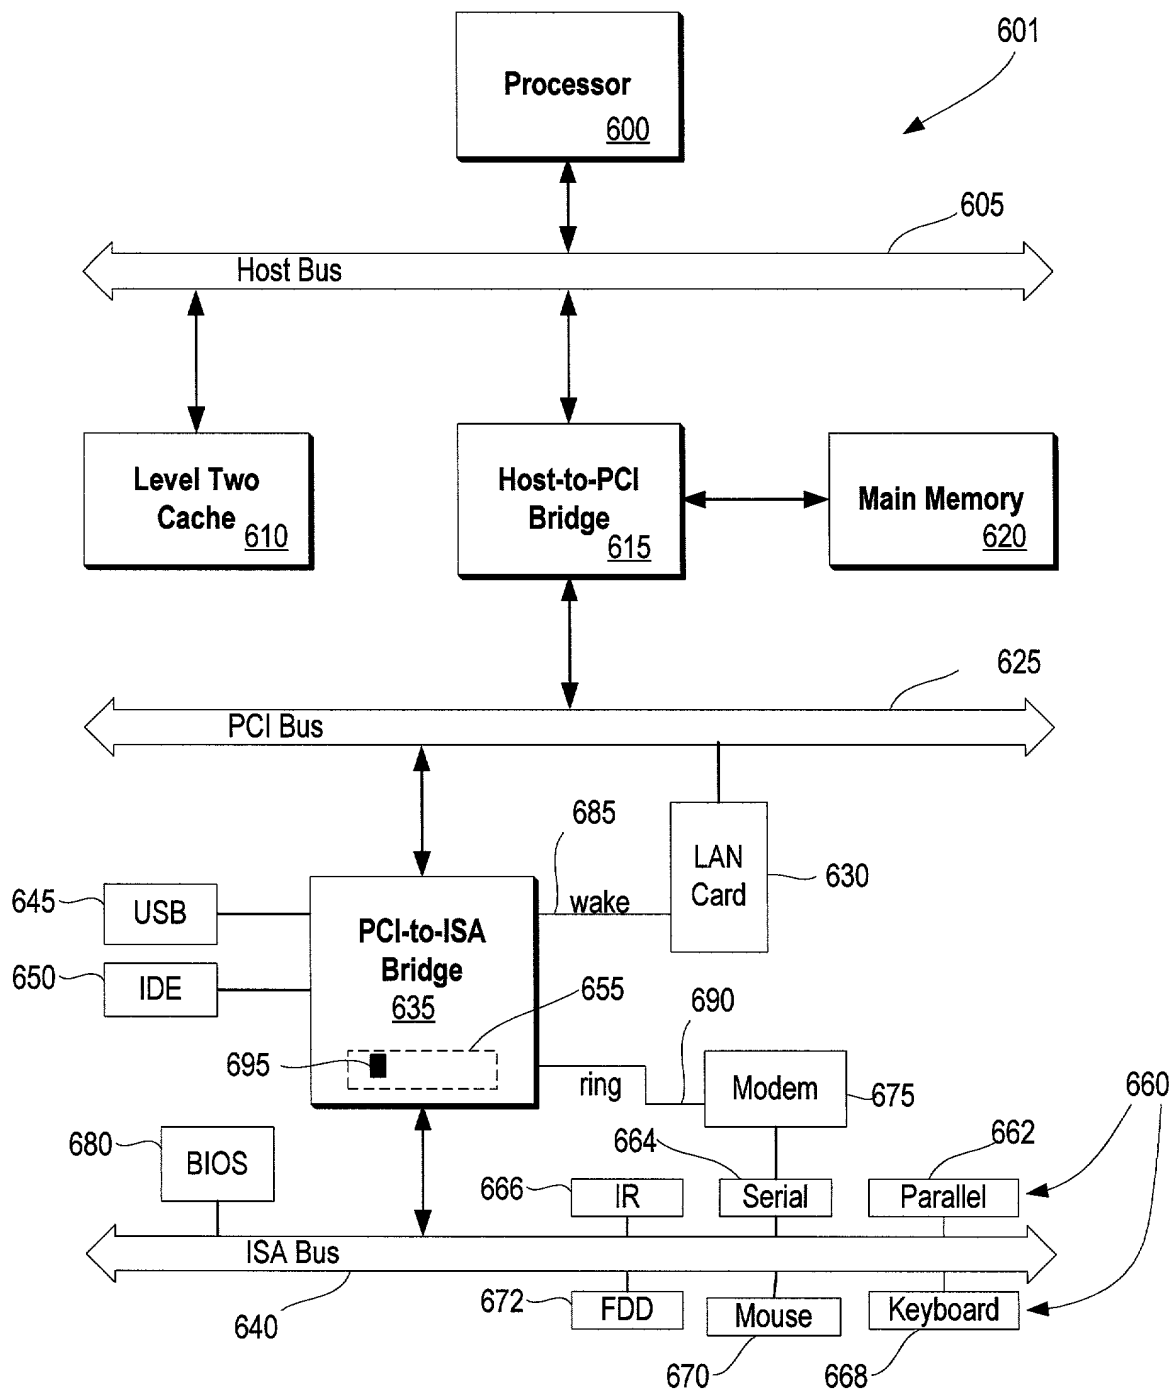


Figure 6

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

System and Method for Managing Multiple Proxy Servers

the specification of which (check one)

 X is attached hereto.

 was filed on
as Application Serial No.
and was amended on (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:


Prior Foreign Application(s):			Priority Claimed	
<u> </u>	<u> </u>	<u> </u>	<u> </u> Yes	<u> </u> No
(Number)	(Country)	(Day/Month/Year)		

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Status)

Page 2

FULL NAME OF SECOND INVENTOR: ~~Shawn Patrick Mullen~~

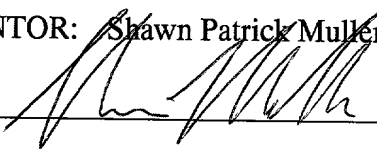
INVENTOR'S SIGNATURE:  DATE: 8/2/00

RESIDENCE: 39 Country Oaks
Buda, Texas 78601

CITIZENSHIP: USA

POST OFFICE ADDRESS: 39 Country Oaks
Buda, Texas 78601

FULL NAME OF THIRD INVENTOR: Johnny Meng-Han Shieh


INVENTOR'S SIGNATURE:  DATE: 8/2/00

RESIDENCE: 5908 Upvalley Run
Austin, Texas 78731

CITIZENSHIP: USA

POST OFFICE ADDRESS: 5908 Upvalley Run
Austin, Texas 78731

FULL NAME OF FOURTH INVENTOR: ^{GUHA} ~~Guja~~ Prasad Venkataraman

INVENTOR'S SIGNATURE:  DATE: Aug. 1, 2000

RESIDENCE: 11215 Research Blvd, #1120
Austin, Texas 78759

CITIZENSHIP: India

POST OFFICE ADDRESS: 11215 Research Blvd, #1120
Austin, Texas 78759